

CJC™ Product Sheet

APPLICATION

The CJC^{TM} Insert EC 27/27 is used in CJC^{TM} Fine Filters and ideal for reduction of the neutralisation number of, for example:

- HFD-Fluids (Phosphoric Ester)
- Transformer oils (Insulating oils)
- · Crankcase lube oils (gas engines)

FILTRATION CAPABILITY

• Neutralisation Capacity

CJC™ EC 27/27 Inserts neutralise acidic components in the fluid created by hydrolysis caused by high thermal load or water contamination.

These components in the operating fluid not only lead to corrosion, deposits and reduced lubricity but also function as a catalyst and accelerate further oxidation and acidification of the fluid.

For HFD-Fluids a maximum neutralisation number of 0.5 is recommended.

Neutralisation number: indicating the amount of potassic hydroxide (KOH) in mg necessary for binding the free acids contained in 1 g of the fluid.

Neutralisation capacity of a EC 27/27 (approximate values):

0.06 with 1,000 litres fluid 0.03 with 2,000 litres fluid 0.015 with 4.000 litres fluid


DIMENSIONS

The figures below are nominal:

Diameter: 27 cm Height: 27 cm

COMPONENTS

The CJC^{TM} Insert EC 27/27 consists of a bag of polyester needlefelt filled with 7 kg of fuller's earth.

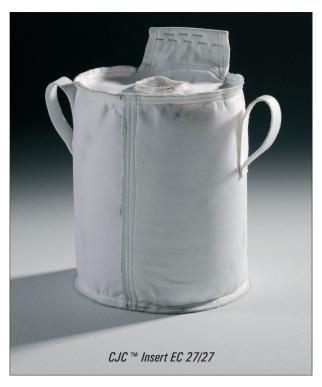

IDENTIFICATION

To order the EC 27/27 Insert, please use:

Article No.:

1 x 27/27: PD5600606